

M23 HMB angled – rotatable

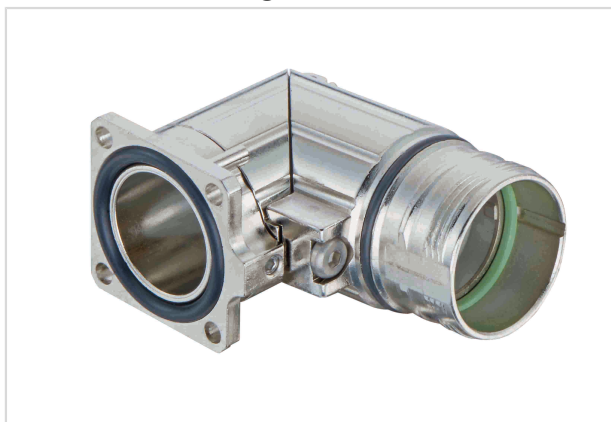


Image is for illustration purposes only. Please refer to product description.

Part number	09 15 100 0902
Specification	M23 HMB angled – rotatable

Identification

Category	Hoods/Housings
Series	Circular connectors M23
Identification	Signal
Type of hood/housing	Bulkhead mounted housing
Description of hood/housing	Front mounting
	Angled
	Rotatable

Version

Locking type	Screw locking
	ComLock rapid locking
Size	M23
Fixing	Fixing hole 4x 2.7 mm

Technical characteristics

Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP67 locked condition
	IP69 / IPX9K acc. to ISO 20653 locked condition

Material properties

Material (hood/housing)	Copper-zinc alloy
Surface (hood/housing)	Nickel plated
Material (seal)	NBR
Colour (seal)	Black
RoHS	compliant

Page 1 / 2 | Creation date 2021-02-25 | Please note that the data specified here were taken as extracts from the online catalogue. Please refer to the user documentation for the complete and up-to-date information and data. Please also note that the user is responsible for validating functionality, conformity with applicable laws and directives, as well as for the electrical safety in the particular application.

HARTING Electronics GmbH | Marienwerderstraße 3 | 32339 Espelkamp | Germany
 Phone +49 5772 47-97200 | electronics@HARTING.com | www.HARTING.com



Pushing Performance

Material properties

ELV status	compliant
China RoHS	e
REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	No

Specifications and approvals

UL / CSA	UL 1977 ECBT2.E235076
----------	-----------------------

Commercial data

Packaging size	5
Net weight	86 g
Country of origin	Germany
European customs tariff number	85389099
eCl@ss	27440224 Shell for circular connectors