
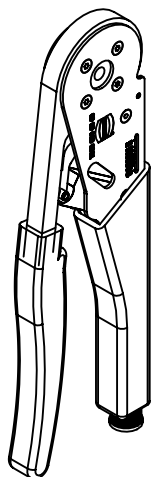

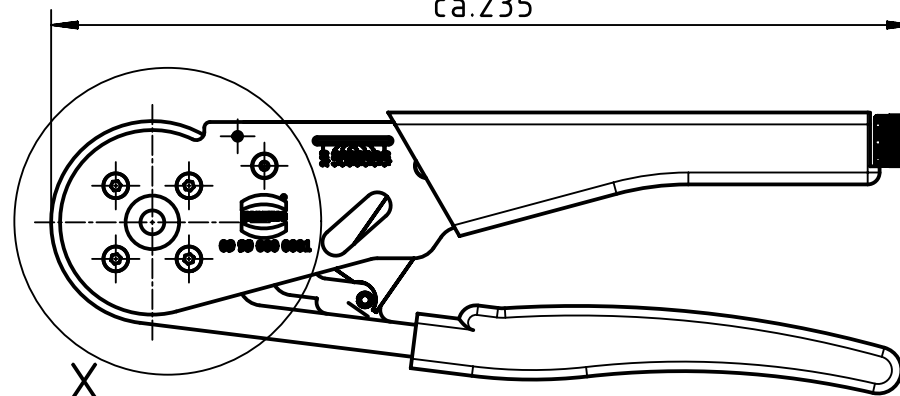


X (1:1)


ca.235

*Usage of contact 09 15 000 6107/6207

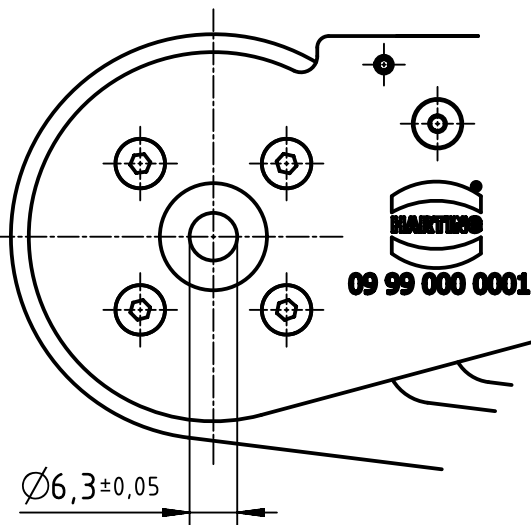

Contacts	mm ²	AWG	Crimping depth
Han D	0,14*	26	1,00
	0,37	22	1,30
	0,50	20	1,55
	0,75	18	1,55
	1,00	18	1,55
	1,50	16	1,80
	1,38	16	1,55
	2,50	14	1,55
Han E	2,10	14	1,45
	0,14	26	1,00
	0,37	22	1,30
	0,50	20	1,55
	0,75	18	1,55
	1,00	18	1,55
	1,50	16	1,80
	1,38	16	1,60
Han C	2,50	14	1,60
	4,00	12	2,00
	1,50	16	1,80
	2,50	14	1,60
	4,00	12	2,00

Crimping depth adjustable from Ø1mm to Ø2mm

		All Dimensions in mm Original Size DIN A4		Scale 1:2		Free size tol.		Ref.					
								Sub.					
		All rights reserved		Created by SPRENB		Inspected by RIEPE		Standardisation RUETERA		Date 2020-07-15		State Final Release	
HARTING Electric GmbH & Co. KG D-32339 Espelkamp		Department EL PD		Title Four-Indent Crimping Tool								Doc-Key / ECM-Nr. 100090804 / UGD/005/B 500000176313	
				Type TB		Number 09 99 000 0001						Rev. B	