


MALE END VIEW

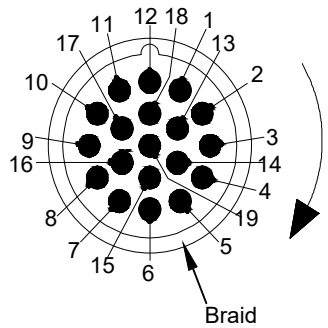


- 1. VT
- 2. RD
- 3. GY
- 4. RD/BU
- 5. GN
- 6. BU
- 7. GY/PK
- 8. WH/GN
- 9. WH/YE
- 10. WH/GY
- 11. BK
- 12. GN/YE
- 13. YE/BN
- 14. BN/GN
- 15. WH
- 16. YE
- 17. PK
- 18. GY/BN
- 19. BN

HARTING P/N	Type of cable	Cable length(mm)
21373300D74050	PUR	5000 <sup>+200</sup> <sub>-0</sub>
21373300D74100	PUR	10000 <sup>+400</sup> <sub>-0</sub>
21373300D75050	PVC	5000 <sup>+200</sup> <sub>-0</sub>
21373300D75100	PVC	10000 <sup>+400</sup> <sub>-0</sub>

SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	PBT/WHITE	
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK	
CONTACT MATERIAL/COLOR	BRASS/GOLD	
COUPLING NUT MATERIAL/PLATING	ZINC ALLOY/NICKEL	
RATED CURRENT	9A(PINS 6,12,19),2A(ALL OTHERS)	
RATED VOLTAGE	150 V	
OUTER CABLR JACKET MATERIAL/COLOR	PVC/BLACK	PUR/BLACK
CONDUCTOR INSULATION MATERIAL	PVC	
NUMBER OF CONDUCTORS (AWG)	3X18AWG+16X22AWG	
OPERATING TEMPERATURE	-40°C — +80°C	
PROTECTION CLASS	IEC IP67	

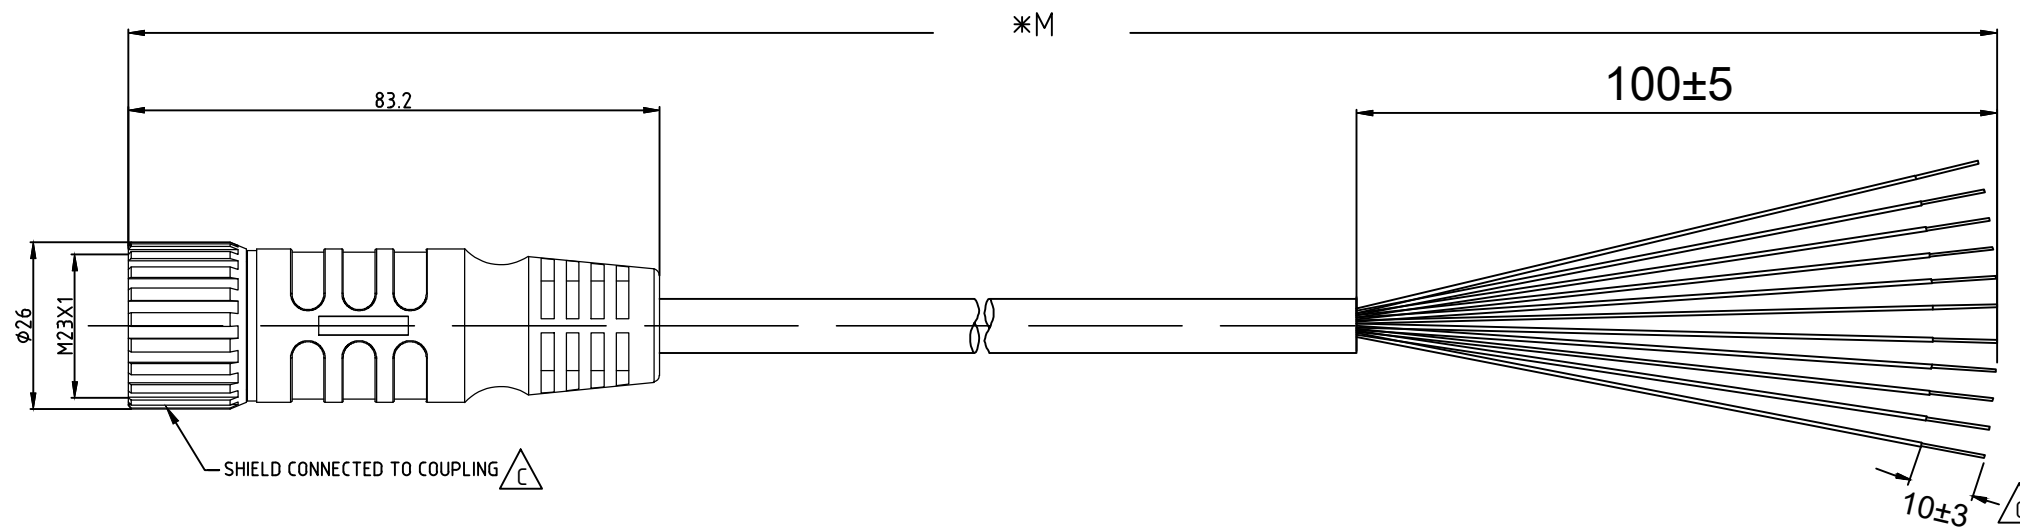

	All Dimensions in mm	Tech. Character.	Free size tol.	According to production drawing
	All rights reserved Department HCS - CN	Created by LINI	Inspected by LIANL	Standardisation LIANL
		Date 2021-09-03	State Final release	Doc-Key / ECM-Nr. /
C	Revised stripping tolerance (ECN21405)	Ivy Lin	09/03/21	Title <b>M23_19P MA,Int-thread,STR PVC/PUR cable,xxM</b>  Type <b>TB</b> Number <b>2137 33 00 D 7X XXX</b>
B	Add braid mark (ECN:21040)	Ivy Lin	01/29/21	
A	First issue.	Lucy Zheng	06/25/19	
Rev.	Description	Appr.	Date	
HARTING Customised Solutions D-32339 Espelkamp				Rev. <b>C</b> Page <b>1/1</b>