


1 MALE END VIEW




- 1. BU
- 2. RD
- 3. BN
- 4. GY
- 5. GN/YE
- 6. RD/BU
- 7. GN
- 8. GY/PK
- 9. WH/GN
- 10. WH/YE
- 11. WH/GY
- 12. BK
- 13. YE/BN
- 14. BN/GN
- 15. WH
- 16. YE
- 17. PK

HARTING P/N	Type of cable	Cable length(mm)
21373300F72050	PUR	5000 <sup>+200</sup> <sub>-0</sub>
21373300F72100	PUR	10000 <sup>+400</sup> <sub>-0</sub>
21373300F73050	PVC	5000 <sup>+200</sup> <sub>-0</sub>
21373300F73100	PVC	10000 <sup>+400</sup> <sub>-0</sub>

5 SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	PBT/WHITE	
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK	
CONTACT MATERIAL/COLOR	BRASS/GOLD	
COUPLING NUT MATERIAL/PLATING	ZINC ALLOY/NICKEL	
RATED CURRENT	9 A	
RATED VOLTAGE	150 V	
OUTER CABLR JACKET MATERIAL/COLOR	PVC/BLACK	PUR/BLACK
CONDUCTOR INSULATION MATERIAL	PVC	
NUMBER OF CONDUCTORS (AWG)	17X18AWG	
OPERATING TEMPERATURE	-40°C — +80°C	
PROTECTION CLASS	IEC IP67	

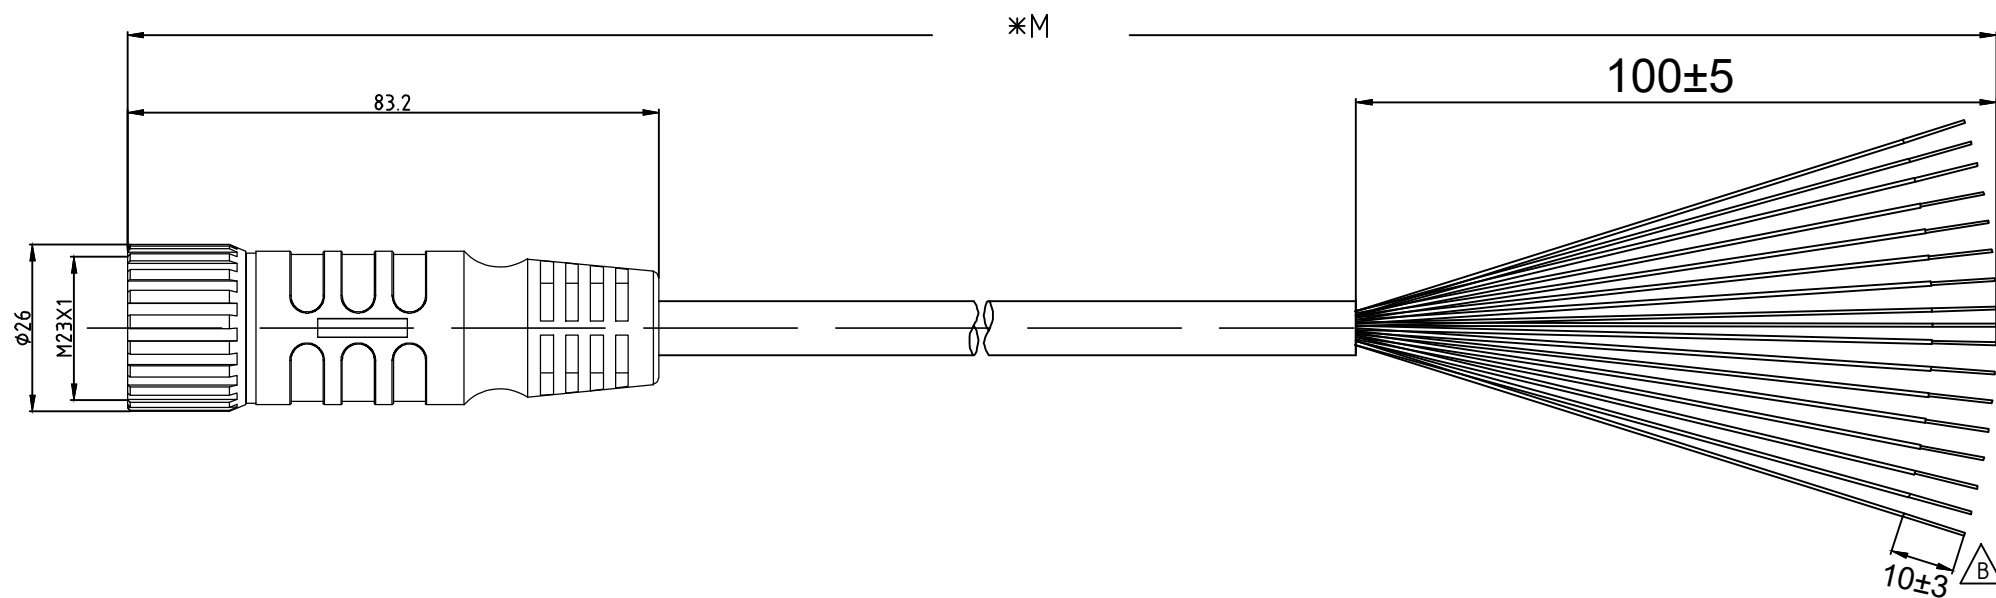

	All Dimensions in mm	Tech. Character.	Free size tol.	According to production drawing
	All rights reserved Department HCS - CN	Created by LINI	Inspected by LIANL	Standardisation LIANL
		Date 2021-09-03	State Final release	
Title M23_17P MA,Int-thread,STR PVC/PUR cable,xxM				Doc-Key / ECM-Nr. /
HARTING Customised Solutions		Type TB	Number 2137 33 00 F 7X XXX	
D-32339 Espelkamp		Rev. B	Page 1/1	

Rev.	Description	Appr.	Date
B	Revised stripping tolerance (ECN21405)	Ivy Lin	08/31/21
A	First issue.	Lucy Zheng	06/25/19