


1 2 3 4 5 6

MALE END VIEW




- 1. BN
- 2. BU
- 3. WH
- 4. GN/YE
- 5. OG
- 6. YE
- 7. GY
- 8. PK
- 9. RD
- 10. BN/WH
- 11. BU/WH
- 12. GN/WH

SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	PBT/WHITE	
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK	
CONTACT MATERIAL/COLOR	BRASS/GOLD	
COUPLING NUT MATERIAL/PLATING	ZINC ALLOY/NICKEL	
RATED CURRENT	6 A	
RATED VOLTAGE	300 V	
OUTER CABLR JACKET MATERIAL/COLOR	PVC/BLACK	PUR/BLACK
CONDUCTOR INSULATION MATERIAL	PVC	
NUMBER OF CONDUCTORS (AWG)	12×18AWG	
OPERATING TEMPERATURE	-40°C — +80°C	
PROTECTION CLASS	IEC IP67	

HARTING P/N	Type of cable	Cable length(mm)
21373400C70050	PUR	5000 <sup>+200</sup> <sub>-0</sub>
21373400C70100	PUR	10000 <sup>+400</sup> <sub>-0</sub>
21373400C71050	PVC	5000 <sup>+200</sup> <sub>-0</sub>
21373400C71100	PVC	10000 <sup>+400</sup> <sub>-0</sub>

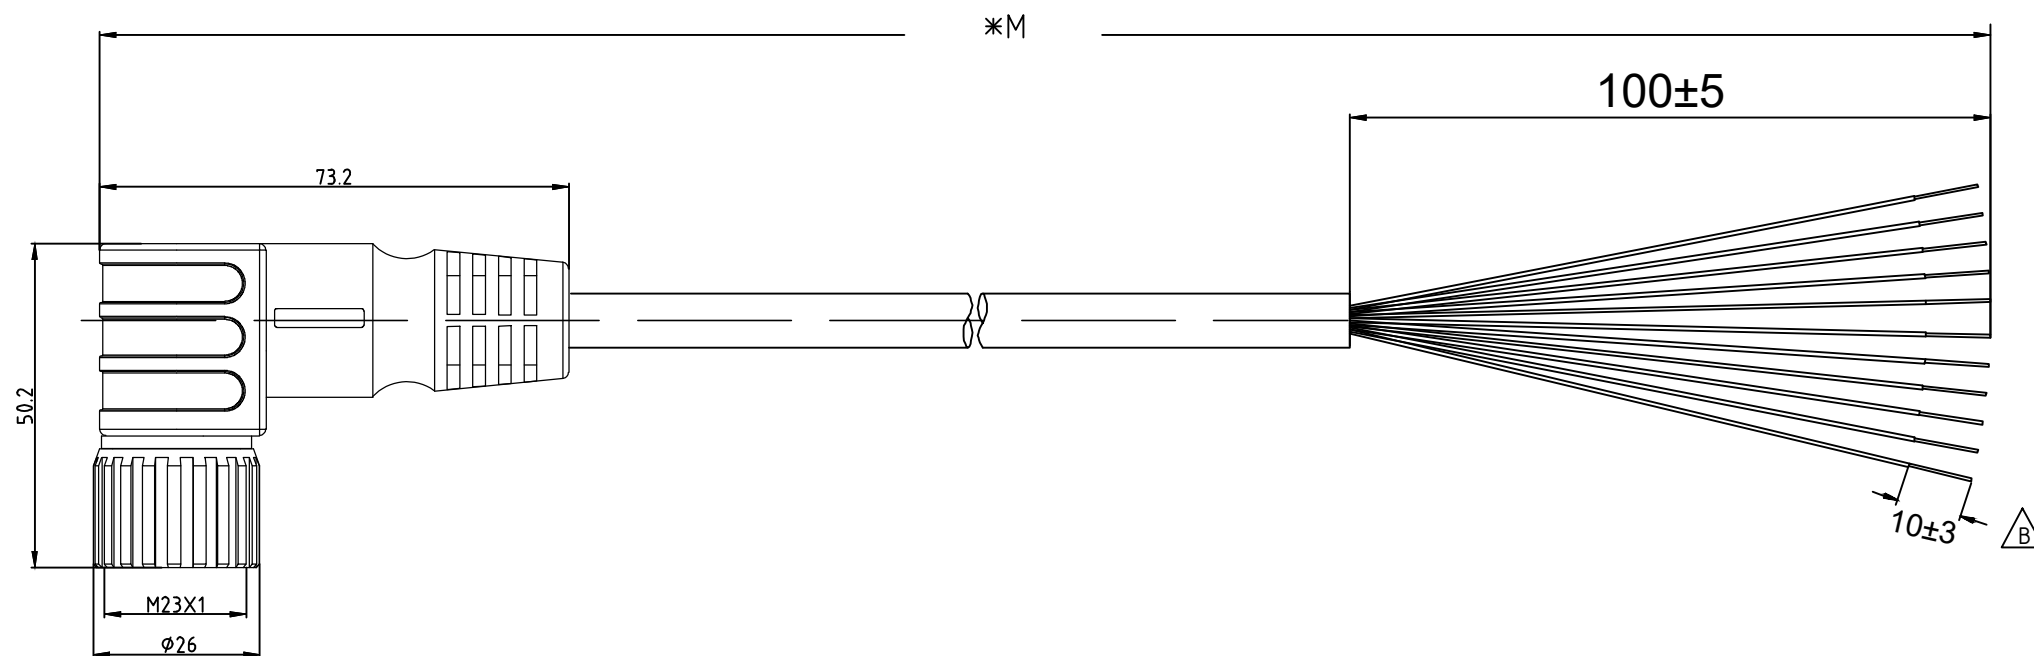

	All rights reserved	Tech. Character.		Free size tol.		According to production drawing	
	Department HCS - CN	Created by LINI	Inspected by LIANL	Standardisation LIANL	Date 2021-08-31	State Final release	
		Title M23_12P MA,Int-thread,ANG PVC/PUR cable,xxM				Doc-Key / ECM-Nr. /	
HARTING Customised Solutions		Type TB	Number 2137 34 00 C 7X XXX			Rev. B	Page 1/1
B	Revised stripping tolerance (ECN21405)	Ivy Lin	08/31/21				
A	First issue.	Lucy Zheng	06/25/19				
Rev.	Description	Appr.	Date	D-32339 Espelkamp			