


2

HARTING P/N	Type of cable	Cable length(mm)
21373400D74050	PUR	5000 ⁺²⁰⁰ ₋₀
21373400D74100	PUR	10000 ⁺⁴⁰⁰ ₋₀
21373400D75050	PVC	5000 ⁺²⁰⁰ ₋₀
21373400D75100	PVC	10000 ⁺⁴⁰⁰ ₋₀

5

6

SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	PBT/WHITE
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/COLOR	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	ZINC ALLOY/NICKEL
RATED CURRENT	9A(PINS 6,12,19),2A(ALL OTHERS)
RATED VOLTAGE	150 V
OUTER CABLR JACKET MATERIAL/COLOR	PVC/BLACK PUR/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	3X18AWG+16X22AWG
OPERATING TEMPERATURE	-40°C — +80°C
PROTECTION CLASS	IEC IP67

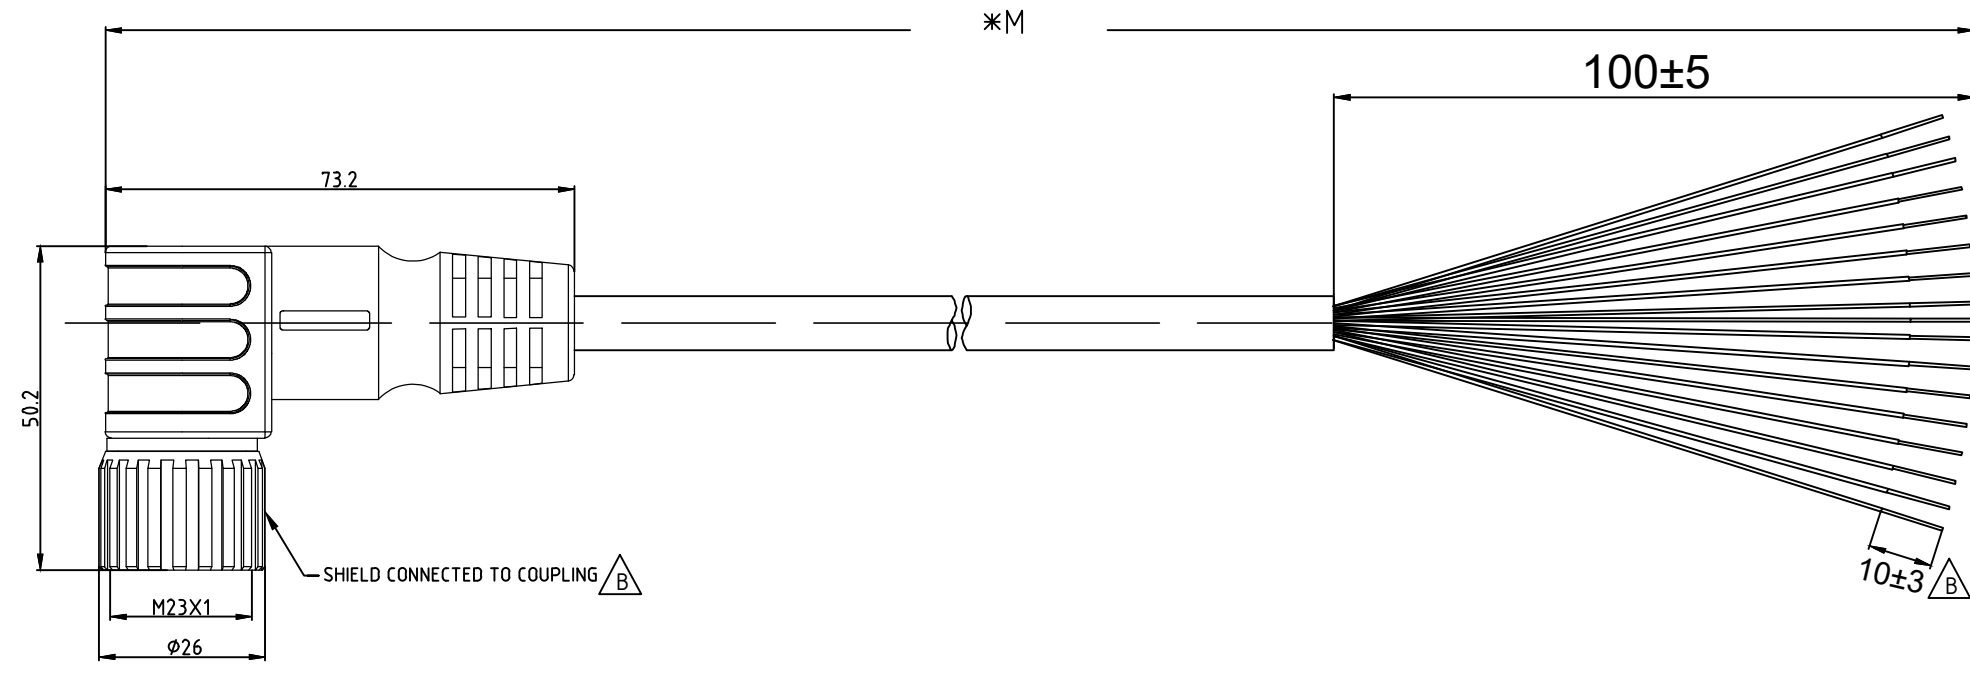

D

	All rights reserved	Created by LINI	Inspected by LIANL	Standardisation LIANL	Date 2021-09-02	State Final release	
	Department HCS - CN	Title M23_19P MA,Int-thread,ANG PVC/PUR cable,xxM				Doc-Key / ECM-Nr. /	
		Type TB				Number 2137 34 00 D 7X XXX	
B	Revised stripping tolerance (ECN21405)	Ivy Lin	09/02/21	HARTING Customised Solutions			
A	First issue.	Lucy Zheng	06/25/19	D-32339 Espelkamp			
Rev.	Description	Appr.	Date				

B	Revised stripping tolerance (ECN21405)	Ivy Lin	09/02/21
A	First issue.	Lucy Zheng	06/25/19
Rev.	Description	Appr.	Date