


HARTING P/N	Type of cable	Cable length(mm)
21373400F72050	PUR	5000 <sup>+200</sup> <sub>-0</sub>
21373400F72100	PUR	10000 <sup>+400</sup> <sub>-0</sub>
21373400F73050	PVC	5000 <sup>+200</sup> <sub>-0</sub>
21373400F73100	PVC	10000 <sup>+400</sup> <sub>-0</sub>

SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	PBT/WHITE
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/COLOR	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	ZINC ALLOY/NICKEL
RATED CURRENT	9 A
RATED VOLTAGE	150 V
OUTER CABLR JACKET MATERIAL/COLOR	PVC/BLACK PUR/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	17X18AWG
OPERATING TEMPERATURE	-40°C — +80°C
PROTECTION CLASS	IEC IP67

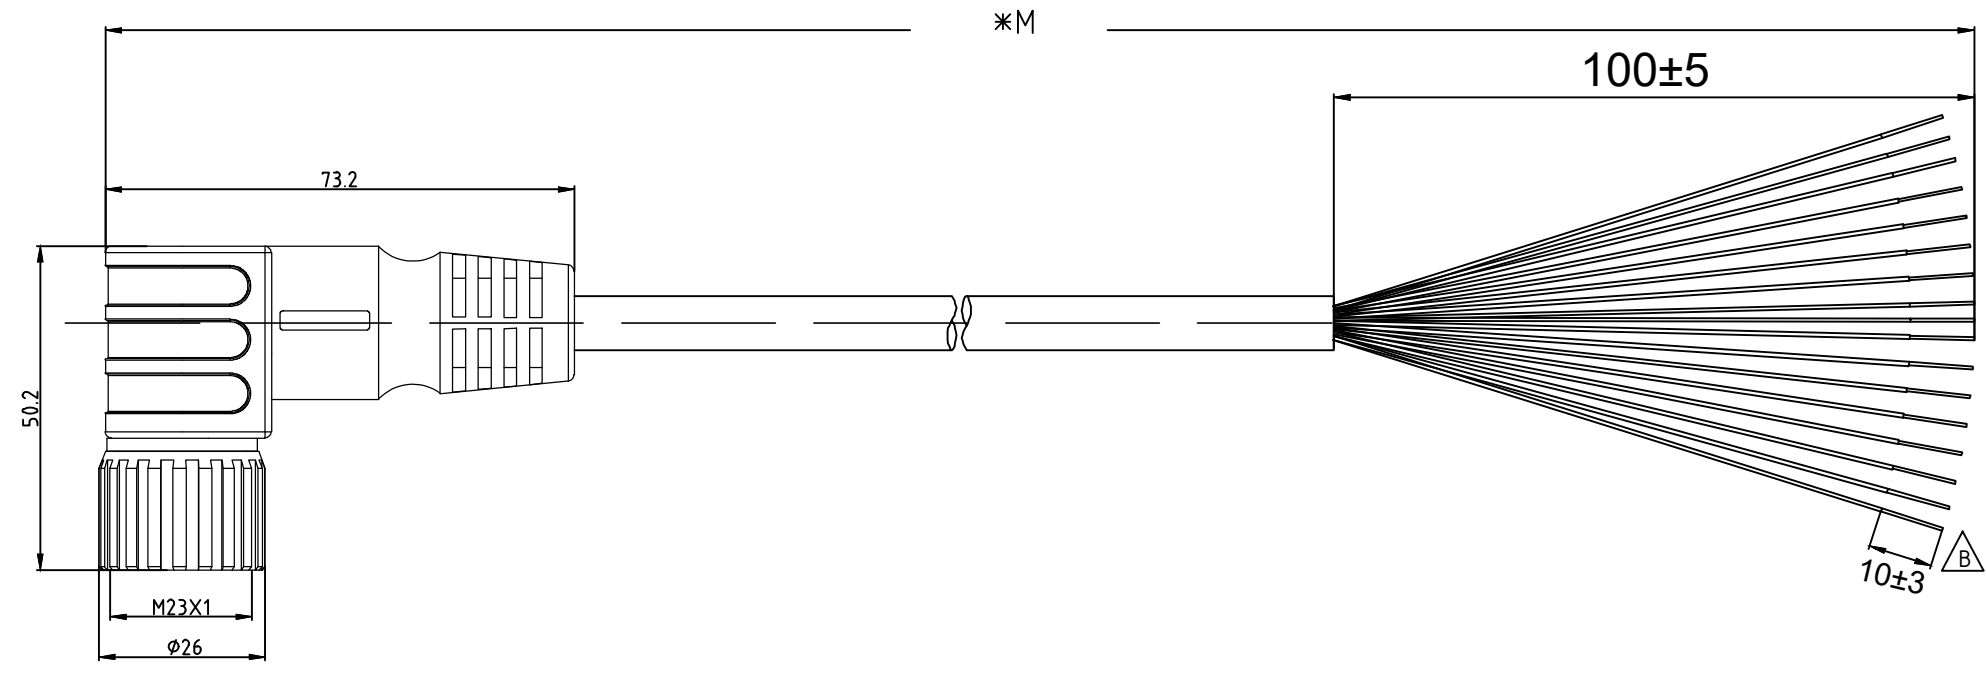

	All rights reserved Department HCS - CN	Created by LINI	Inspected by LIANL	Standardisation LIANL	Date 2021-08-31	State Final release	Doc-Key / ECM-Nr. /
All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
HARTING Customised Solutions		Title M23_17P MA,Int-thread,ANG PVC/PUR cable,xxM				Rev. <b>B</b>	
D-32339 Espelkamp		Type TB	Number 2137 34 00 F 7X XXX			Page 1/1	
Rev.	Description	Appr.	Date				
B	Revised stripping tolerance (ECN21405)	Ivy Lin	08/31/21				
A	First issue.	Lucy Zheng	06/25/19				