
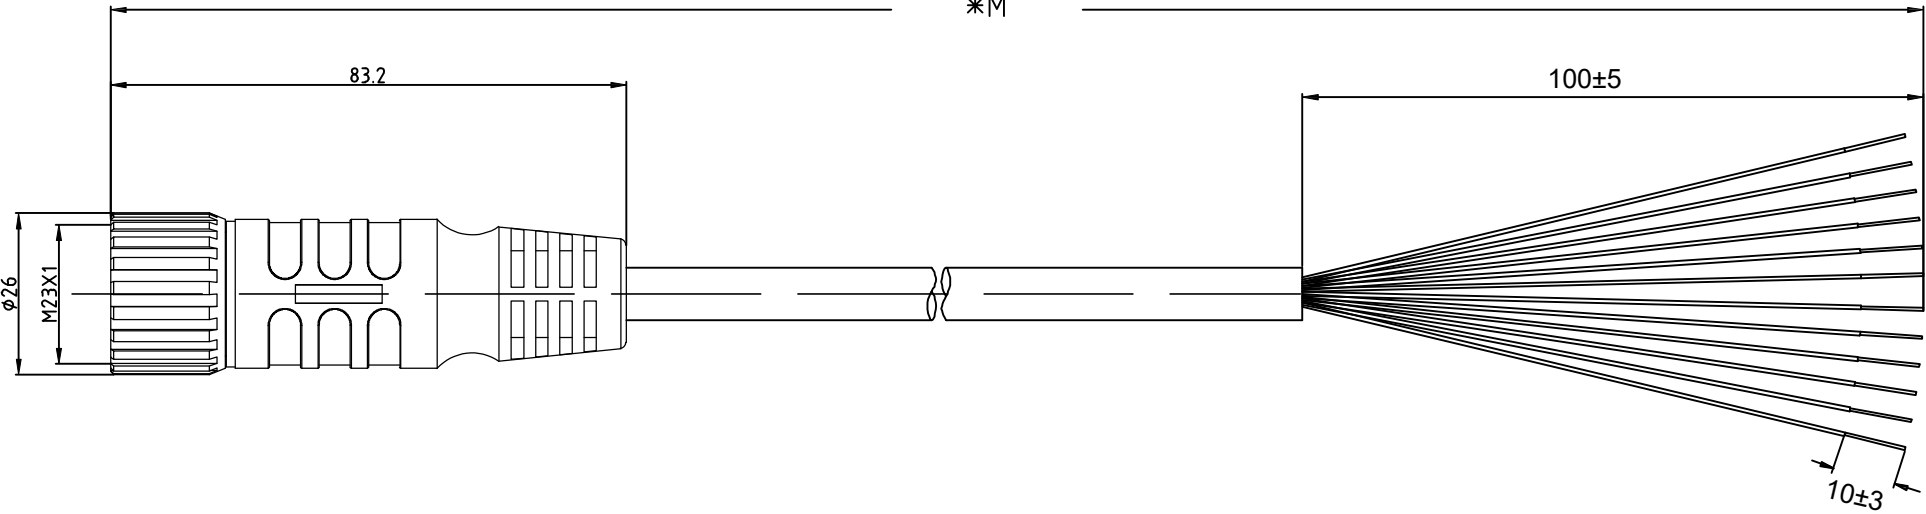


1		2		3		4		5		6																																																									
A FEMALE END VIEW  1. BN 2. BU 3. WH 4. GN/YE 5. OG 6. YE 7. GY 8. PK 9. RD 10. BN/WH 11. BU/WH 12. GN/WH		<table><tr><th>HARTING P/N</th><th>Type of cable</th><th>Cable length(mm)</th></tr><tr><td>21373500C70050</td><td>PUR</td><td>5000⁺²⁰⁰₋₀</td></tr><tr><td>21373500C70100</td><td>PUR</td><td>10000⁺⁴⁰⁰₋₀</td></tr></table>				HARTING P/N	Type of cable	Cable length(mm)	21373500C70050	PUR	5000 ⁺²⁰⁰ ₋₀	21373500C70100	PUR	10000 ⁺⁴⁰⁰ ₋₀	<table><tr><th colspan="2">SPECIFICATIONS</th></tr><tr><td>CONTACT CARRIER MATERIAL/COLOR</td><td>PBT/WHITE</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/BLACK</td></tr><tr><td>CONTACT MATERIAL/COLOR</td><td>BRASS/SILVER</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>ZINC ALLOY/NICKEL</td></tr><tr><td>RATED CURRENT</td><td>6 A</td></tr><tr><td>RATED VOLTAGE</td><td>300 V</td></tr><tr><td>OUTER CABLR JACKET MATERIAL/COLOR</td><td>PUR/BLACK</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBER OF CONDUCTORS (AWG)</td><td>12X18AWG</td></tr><tr><td>OPERATING TEMPERATURE</td><td>-40°C — +80°C</td></tr><tr><td>PROTECTION CLASS</td><td>IEC IP67</td></tr></table>				SPECIFICATIONS		CONTACT CARRIER MATERIAL/COLOR	PBT/WHITE	MOLDED HEAD MATERIAL/COLOR	TPU/BLACK	CONTACT MATERIAL/COLOR	BRASS/SILVER	COUPLING NUT MATERIAL/PLATING	ZINC ALLOY/NICKEL	RATED CURRENT	6 A	RATED VOLTAGE	300 V	OUTER CABLR JACKET MATERIAL/COLOR	PUR/BLACK	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTORS (AWG)	12X18AWG	OPERATING TEMPERATURE	-40°C — +80°C	PROTECTION CLASS	IEC IP67																									
		HARTING P/N	Type of cable	Cable length(mm)																																																															
21373500C70050	PUR	5000 ⁺²⁰⁰ ₋₀																																																																	
21373500C70100	PUR	10000 ⁺⁴⁰⁰ ₋₀																																																																	
SPECIFICATIONS																																																																			
CONTACT CARRIER MATERIAL/COLOR	PBT/WHITE																																																																		
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK																																																																		
CONTACT MATERIAL/COLOR	BRASS/SILVER																																																																		
COUPLING NUT MATERIAL/PLATING	ZINC ALLOY/NICKEL																																																																		
RATED CURRENT	6 A																																																																		
RATED VOLTAGE	300 V																																																																		
OUTER CABLR JACKET MATERIAL/COLOR	PUR/BLACK																																																																		
CONDUCTOR INSULATION MATERIAL	PVC																																																																		
NUMBER OF CONDUCTORS (AWG)	12X18AWG																																																																		
OPERATING TEMPERATURE	-40°C — +80°C																																																																		
PROTECTION CLASS	IEC IP67																																																																		
B																																																																			
C																																																																			
D		<table><tr><td colspan="2"></td><td colspan="2">All rights reserved</td><td colspan="2">Created by LINI</td><td colspan="2">Inspected by LIANL</td><td colspan="2">Standardisation LIANL</td><td colspan="2">Date 2022-10-13</td><td colspan="2">State Final release</td></tr><tr><td colspan="2"></td><td colspan="2">Department HCS - CN</td><td colspan="2">Title M23_12P FE,Int-thread,STR PUR cable,xxM</td><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td><td colspan="2">Doc-Key / ECM-Nr. /</td></tr><tr><td colspan="2"></td><td colspan="2">HARTING Customised Solutions</td><td colspan="2">Type TB</td><td colspan="2">Number 2137 35 00 C 70 XXX</td><td colspan="2"></td><td colspan="2"></td><td colspan="2">Rev. A</td></tr><tr><td colspan="2"></td><td colspan="2">D-32339 Espelkamp</td><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td><td colspan="2">Page 1/1</td></tr></table>												All rights reserved		Created by LINI		Inspected by LIANL		Standardisation LIANL		Date 2022-10-13		State Final release				Department HCS - CN		Title M23_12P FE,Int-thread,STR PUR cable,xxM								Doc-Key / ECM-Nr. /				HARTING Customised Solutions		Type TB		Number 2137 35 00 C 70 XXX						Rev. A				D-32339 Espelkamp										Page 1/1	
		All rights reserved		Created by LINI		Inspected by LIANL		Standardisation LIANL		Date 2022-10-13		State Final release																																																							
		Department HCS - CN		Title M23_12P FE,Int-thread,STR PUR cable,xxM								Doc-Key / ECM-Nr. /																																																							
		HARTING Customised Solutions		Type TB		Number 2137 35 00 C 70 XXX						Rev. A																																																							
		D-32339 Espelkamp										Page 1/1																																																							
A		First issue.		Ivy Lin		10/13/22																																																													
Rev.		Description		Appr.		Date																																																													