FEMALE END VIEW



1. BN
2. BU
3. WH
4. BN/RD
5. OG
6. YE
7. GY
8. PK
9. RD
10. BN/WH
11. BU/WH
12. GN/WH

HARTING P/N	Type of cable	Cable length(mm)
21373500C71050	PVC	5000^{+200}_{-0}
21373500C71100	PVC	10000^{+400}_{-0}

SPECIFICATIONS	
CONTANCT CARRIER MATERIAL/COLOR	PBT/WHITE
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/COLOR	BRASS/SILVER
COUPLING NUT MATERIAL/PLATING	ZINC ALLOY/NICKEL
RATED CURRENT	6 A
RATED VOLTAGE	300 V
OUTER CABLR JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	12X18AWG
OPERATING TEMPERATURE	-40°C — +80°C
PROTECTION CLASS	IEC IP67

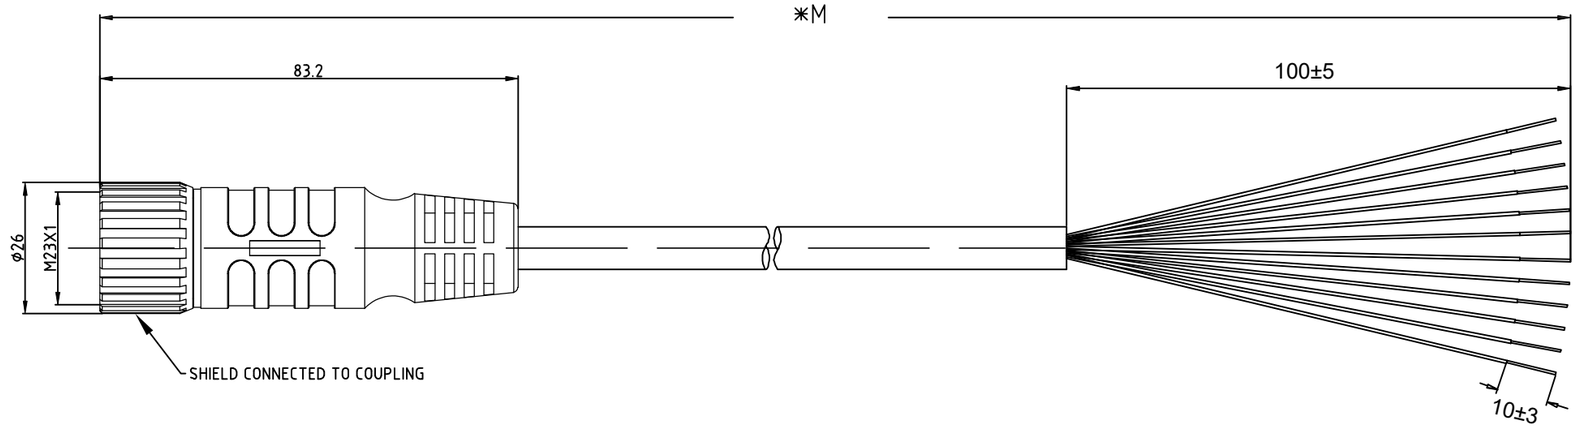

A	First issue.	Ivy Lin	10/13/22
Rev.	Description	Appr.	Date

All Dimensions in mm | Tech. Character. | Free size tol. | According to production drawing

All rights reserved

Department HCS - CN

HARTING Customised Solutions

D-32339 Espelkamp

Created by	Inspected by	Standardisation	Date	State
LINI	LIANL	LIANL	2022-10-13	Final release

Title: M23_12P FE,Int-thread,STR PVC cable,xxM

Doc-Key / ECM-Nr.: /

Type: TB

Number: 2137 35 00 C 71 XXX

Rev.: A

Page: 1/1

A4