FEMALE END VIEW



1. VT
2. RD
3. GY
4. RD/BU
5. GN
6. BU
7. GY/PK
8. WH/GN
9. WH/YE
10. WH/GY
11. BK
12. GN/YE
13. YE/BN
14. BN/GN
15. WH
16. YE
17. PK
18. GY/BN
19. BN

HARTING P/N	Type of cable	Cable length(mm)
21373500D74050	PUR	5000^{+200}_{-0}
21373500D74100	PUR	10000^{+400}_{-0}
21373500D74150	PUR	15000^{+600}_{-0}

SPECIFICATIONS	
CONTANCT CARRIER MATERIAL/COLOR	PBT/WHITE
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/COLOR	BRASS/SILVER
COUPLING NUT MATERIAL/PLATING	ZINC ALLOY/NICKEL
RATED CURRENT	9A(PINS 6,12,19),2A(ALL OTHERS)
RATED VOLTAGE	150 V
OUTER CABLR JACKET MATERIAL/COLOR	PUR/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	3X18AWG+16X22AWG
OPERATING TEMPERATURE	-40°C — +80°C
PROTECTION CLASS	IEC IP67

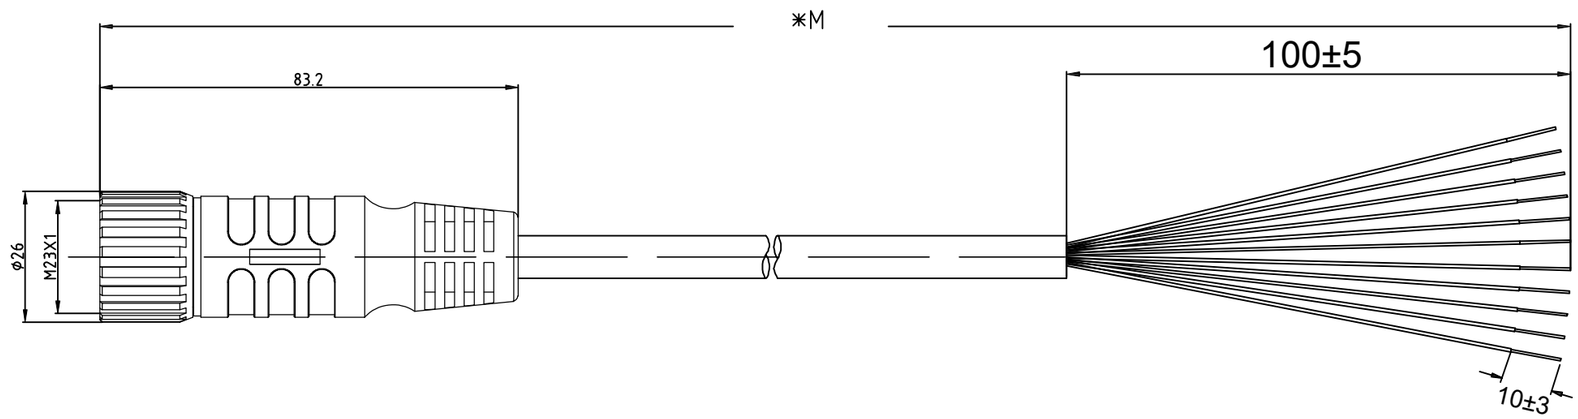

All Dimensions in mm

Tech. Character.

Free size tol.

According to production drawing

All rights reserved

Department HCS - CN

HARTING Customised Solutions

D-32339 Espelkamp

Created by	Inspected by	Standardisation	Date	State
LINI	LIANL	LIANL	2022-11-02	Final release

Title: M23_19P FE,Int-thread,STR PUR cable,xxM

Doc-Key / ECM-Nr.: /

Type: TB

Number: 2137 35 00 D 74 XXX

Rev.: A

Page: 1/1

Rev.	Description	Appr.	Date
A	First issue.	Ivy Lin	11/02/22

A4