FEMALE END VIEW



1. BN
2. BU
3. WH
4. GN/YE
5. OG
6. YE
7. GY
8. PK
9. RD
10. BN/WH
11. BU/WH
12. GN/WH

HARTING P/N	Type of cable	Cable length(mm)
21373600C70050	PUR	5000^{+200}_{-0}
21373600C70100	PUR	10000^{+400}_{-0}
21373600C71050	PVC	5000^{+200}_{-0}
21373600C71100	PVC	10000^{+400}_{-0}

SPECIFICATIONS		
CONTANCT CARRIER MATERIAL/COLOR	PBT/WHITE	
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK	
CONTACT MATERIAL/COLOR	BRASS/SILVER	
COUPLING NUT MATERIAL/PLATING	ZINC ALLOY/NICKEL	
RATED CURRENT	6 A	
RATED VOLTAGE	300 V	
OUTER CABLR JACKET MATERIAL/COLOR	PVC/BLACK	PUR/BLACK
CONDUCTOR INSULATION MATERIAL	PVC	
NUMBER OF CONDUCTORS (AWG)	12X18AWG	
OPERATING TEMPERATURE	-40°C — +80°C	
PROTECTION CLASS	IEC IP67	

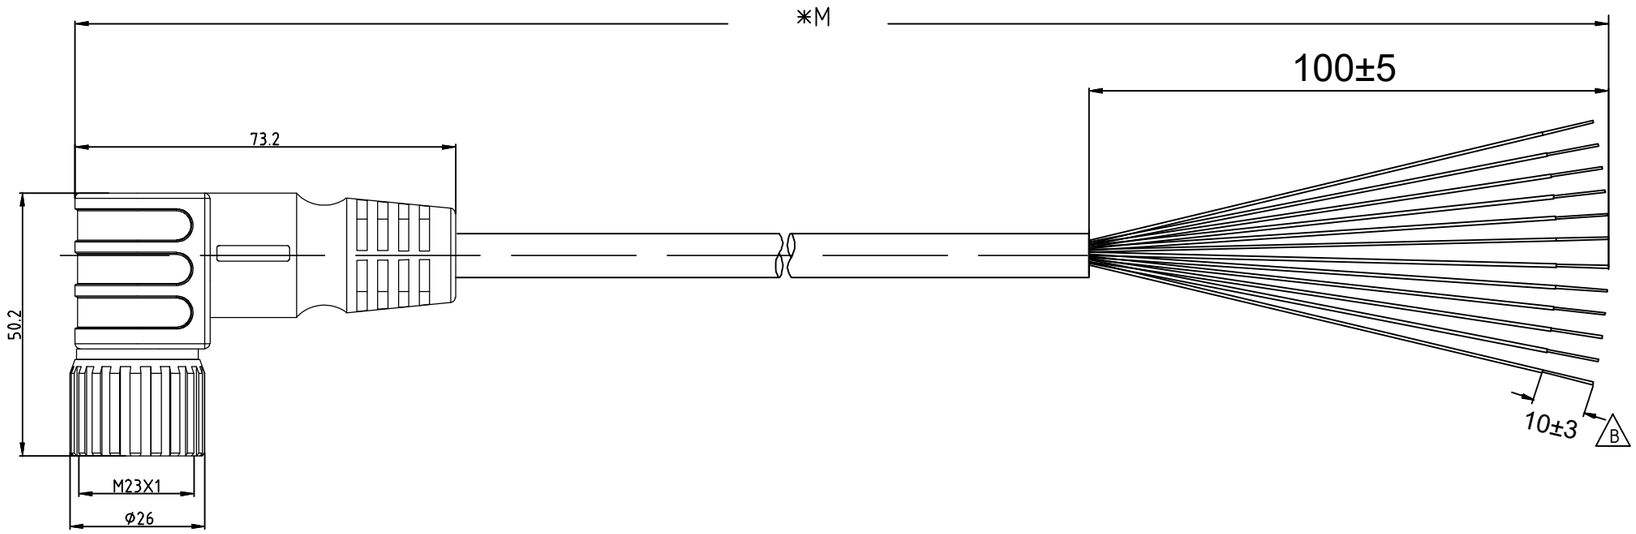

B	Revised stripping tolerance (ECN21405)	Ivy Lin	08/31/21
A	First issue.	Lucy Zheng	06/25/19
Rev.	Description	Appr.	Date

All Dimensions in mm | Tech. Character. | Free size tol. | According to production drawing

All rights reserved

Department HCS - CN

HARTING Customised Solutions

D-32339 Espelkamp

Created by	Inspected by	Standardisation	Date	State
LINI	LIANL	LIANL	2021-08-31	Final release

Title: M23_12P FE,Int-thread,ANG PVC/PUR cable,xxM

Doc-Key / ECM-Nr.: /

Type: TB

Number: 2137 36 00 C 7X XXX

Rev.: B

Page: 1/1