
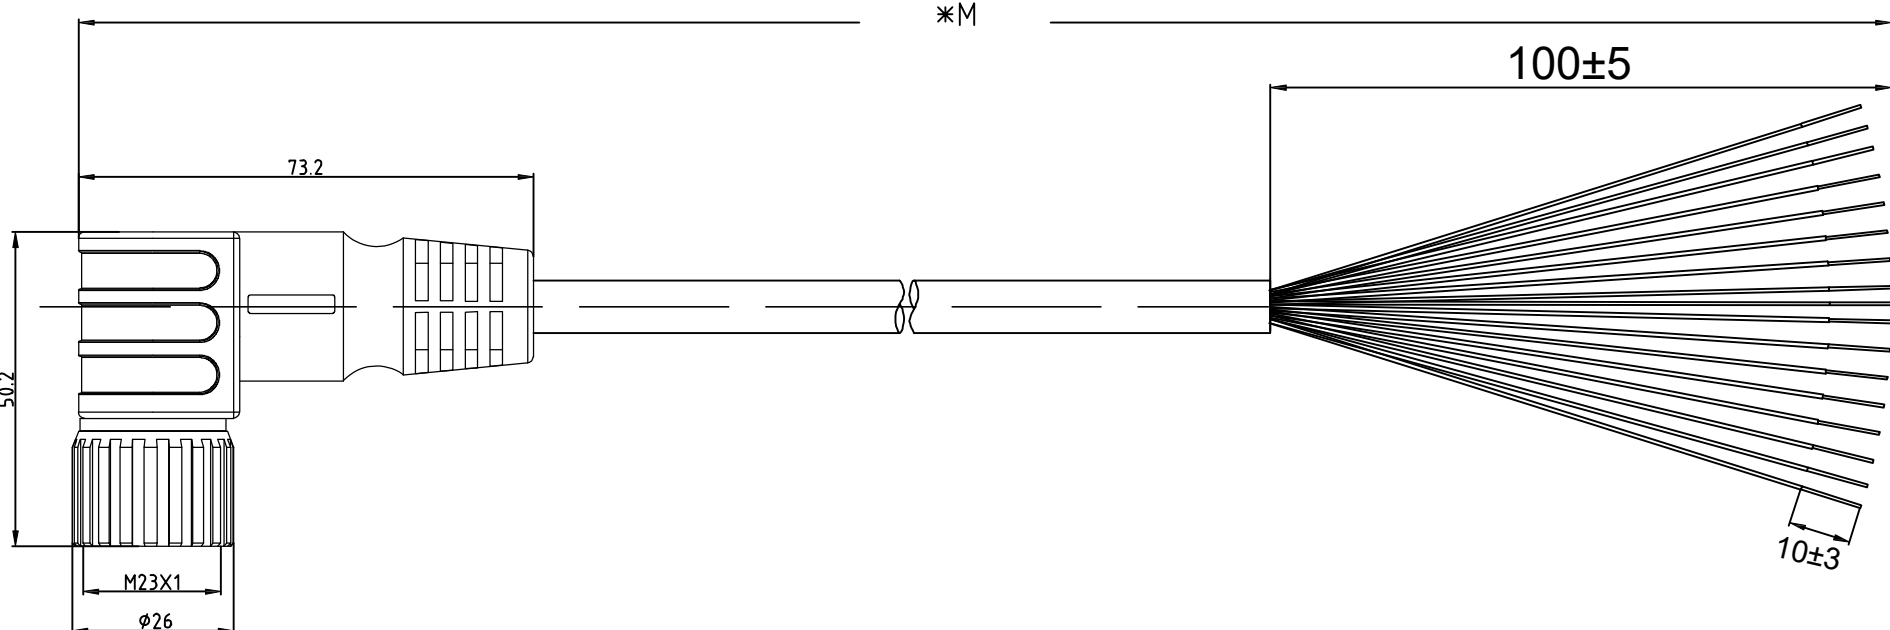





1		2		3		4		5		6																																																						
A		FEMALE END VIEW  1. VT 2. RD 3. GY 4. RD/BU 5. GN 6. BU 7. GY/PK 8. WH/GN 9. WH/YE 10. WH/GY 11. BK 12. GN/YE 13. YE/BN 14. BN/GN 15. WH 16. YE 17. PK 18. GY/BN 19. BN				<table><tr><th>HARTING P/N</th><th>Type of cable</th><th>Cable length(mm)</th></tr><tr><td>21373600D74050</td><td>PUR</td><td>5000⁺²⁰⁰₋₀</td></tr><tr><td>21373600D74100</td><td>PUR</td><td>10000⁺⁴⁰⁰₋₀</td></tr></table>		HARTING P/N	Type of cable	Cable length(mm)	21373600D74050	PUR	5000 ⁺²⁰⁰ ₋₀	21373600D74100	PUR	10000 ⁺⁴⁰⁰ ₋₀	<table><tr><th colspan="2">SPECIFICATIONS</th></tr><tr><td>CONTANCT CARRIER MATERIAL/COLOR</td><td>PBT/WHITE</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/BLACK</td></tr><tr><td>CONTACT MATERIAL/COLOR</td><td>BRASS/SILVER</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>ZINC ALLOY/NICKEL</td></tr><tr><td>RATED CURRENT</td><td>9A(PINS 6,12,19),2A(ALL OTHERS)</td></tr><tr><td>RATED VOLTAGE</td><td>150 V</td></tr><tr><td>OUTER CABLR JACKET MATERIAL/COLOR</td><td>PUR/BLACK</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBER OF CONDUCTORS (AWG)</td><td>3X18AWG+16X22AWG</td></tr><tr><td>OPERATING TEMPERATURE</td><td>-40°C — +80°C</td></tr><tr><td>PROTECTION CLASS</td><td>IEC IP67</td></tr></table>				SPECIFICATIONS		CONTANCT CARRIER MATERIAL/COLOR	PBT/WHITE	MOLDED HEAD MATERIAL/COLOR	TPU/BLACK	CONTACT MATERIAL/COLOR	BRASS/SILVER	COUPLING NUT MATERIAL/PLATING	ZINC ALLOY/NICKEL	RATED CURRENT	9A(PINS 6,12,19),2A(ALL OTHERS)	RATED VOLTAGE	150 V	OUTER CABLR JACKET MATERIAL/COLOR	PUR/BLACK	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTORS (AWG)	3X18AWG+16X22AWG	OPERATING TEMPERATURE	-40°C — +80°C	PROTECTION CLASS	IEC IP67																				
						HARTING P/N	Type of cable	Cable length(mm)																																																								
21373600D74050	PUR	5000 ⁺²⁰⁰ ₋₀																																																														
21373600D74100	PUR	10000 ⁺⁴⁰⁰ ₋₀																																																														
SPECIFICATIONS																																																																
CONTANCT CARRIER MATERIAL/COLOR	PBT/WHITE																																																															
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK																																																															
CONTACT MATERIAL/COLOR	BRASS/SILVER																																																															
COUPLING NUT MATERIAL/PLATING	ZINC ALLOY/NICKEL																																																															
RATED CURRENT	9A(PINS 6,12,19),2A(ALL OTHERS)																																																															
RATED VOLTAGE	150 V																																																															
OUTER CABLR JACKET MATERIAL/COLOR	PUR/BLACK																																																															
CONDUCTOR INSULATION MATERIAL	PVC																																																															
NUMBER OF CONDUCTORS (AWG)	3X18AWG+16X22AWG																																																															
OPERATING TEMPERATURE	-40°C — +80°C																																																															
PROTECTION CLASS	IEC IP67																																																															
B																																																																
C		<table><tr><td colspan="2"></td><td colspan="2">Tech. Character.</td><td colspan="2">Free size tol.</td><td colspan="4">According to production drawing</td></tr><tr><td rowspan="2"></td><td colspan="2">All rights reserved</td><td colspan="2">Created by LINI</td><td colspan="2" rowspan="3">Inspected by LIANL</td><td colspan="2" rowspan="6">Standardisation LIANL</td><td colspan="2">Date 2022-11-02</td></tr><tr><td colspan="2" rowspan="4">Department HCS - CN</td><td colspan="6">Title M23_19P FE,Int-thread,ANG PUR cable,xxM</td><td colspan="2">State Final release</td></tr><tr><td colspan="3">HARTING Customised Solutions</td><td colspan="6">Doc-Key / ECM-Nr. /</td><td colspan="2">Rev. A</td></tr><tr><td colspan="3" rowspan="2">D-32339 Espelkamp</td><td colspan="2" rowspan="3">Type TB</td><td colspan="4" rowspan="3">Number 2137 36 00 D 74 XXX</td><td colspan="2" rowspan="3">Page 1/1</td></tr></table>												Tech. Character.		Free size tol.		According to production drawing					All rights reserved		Created by LINI		Inspected by LIANL		Standardisation LIANL		Date 2022-11-02		Department HCS - CN		Title M23_19P FE,Int-thread,ANG PUR cable,xxM						State Final release		HARTING Customised Solutions			Doc-Key / ECM-Nr. /						Rev. A		D-32339 Espelkamp			Type TB		Number 2137 36 00 D 74 XXX				Page 1/1	
														Tech. Character.		Free size tol.		According to production drawing																																														
	All rights reserved		Created by LINI		Inspected by LIANL		Standardisation LIANL		Date 2022-11-02																																																							
	Department HCS - CN		Title M23_19P FE,Int-thread,ANG PUR cable,xxM						State Final release																																																							
HARTING Customised Solutions			Doc-Key / ECM-Nr. /						Rev. A																																																							
D-32339 Espelkamp			Type TB		Number 2137 36 00 D 74 XXX				Page 1/1																																																							
D		<table><tr><td>A</td><td>First issue.</td><td>Ivy Lin</td><td>11/02/22</td></tr><tr><td>Rev.</td><td>Description</td><td>Appr.</td><td>Date</td></tr></table>										A	First issue.	Ivy Lin	11/02/22	Rev.	Description	Appr.	Date																																													
												A	First issue.	Ivy Lin	11/02/22																																																	
Rev.	Description	Appr.	Date																																																													