


2

HARTING P/N	Type of cable	Cable length(mm)
21373600F72050	PUR	5000 ⁺²⁰⁰ ₋₀
21373600F72100	PUR	10000 ⁺⁴⁰⁰ ₋₀
21373600F73050	PVC	5000 ⁺²⁰⁰ ₋₀
21373600F73100	PVC	10000 ⁺⁴⁰⁰ ₋₀

5

6

SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	PBT/WHITE
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/COLOR	BRASS/SILVER
COUPLING NUT MATERIAL/PLATING	ZINC ALLOY/NICKEL
RATED CURRENT	9A(POWER);2A(SIGNAL)
RATED VOLTAGE	150 V
OUTER CABLR JACKET MATERIAL/COLOR	PVC/BLACK PUR/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	3x18AWG+16X22AWG(CUT OFF VT,GY/BN)
OPERATING TEMPERATURE	-40°C — +80°C
PROTECTION CLASS	IEC IP67

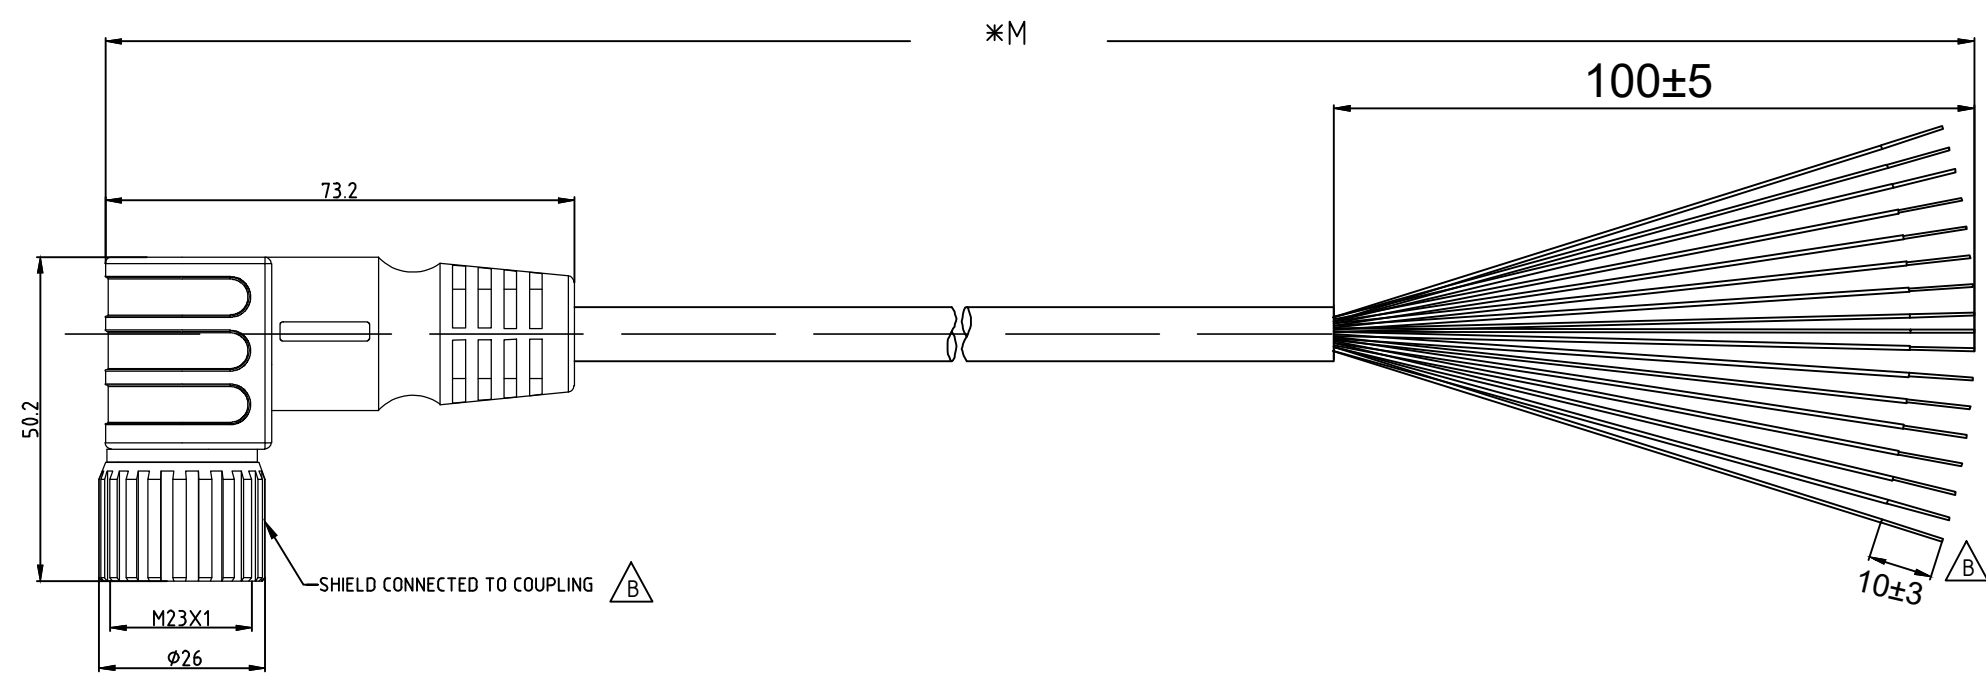

D

B	Revised stripping tolerance (ECN21405)	Ivy Lin	09/03/21
A	First issue.	Lucy Zheng	06/25/19
Rev.	Description	Appr.	Date

	All rights reserved	Created by LINI	Inspected by LIANL	Standardisation LIANL	Date 2021-09-03	State Final release	
Department HCS - CN		Title M23_17P FE,Int-thread,ANG PVC/PUR cable,xxM				Doc-Key / ECM-Nr. /	
HARTING Customised Solutions		Type TB	Number 2137 36 00 F 7X XXX			Rev. B	Page 1/1
D-32339 Espelkamp							

All Dimensions in mm

Tech. Character.

Free size tol.

According to production drawing