


HARTING P/N	Revision	Cable length(mm)
21373800676050	01	5000 ⁺²⁰⁰ ₋₀
21373800676100	01	10000 ⁺⁴⁰⁰ ₋₀

SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	PBT/WHITE
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/COLOR	BRASS/SILVER
COUPLING NUT MATERIAL/PLATING	ZINC ALLOY/NICKEL
RATED CURRENT	14A
RATED VOLTAGE	630V
OUTER CABLR JACKET MATERIAL/COLOR	PUR/DRANGE
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	4G1.5+(2x1.5)
OPERATING TEMPERATURE	-40°C — +80°C
PROTECTION CLASS	IEC IP67

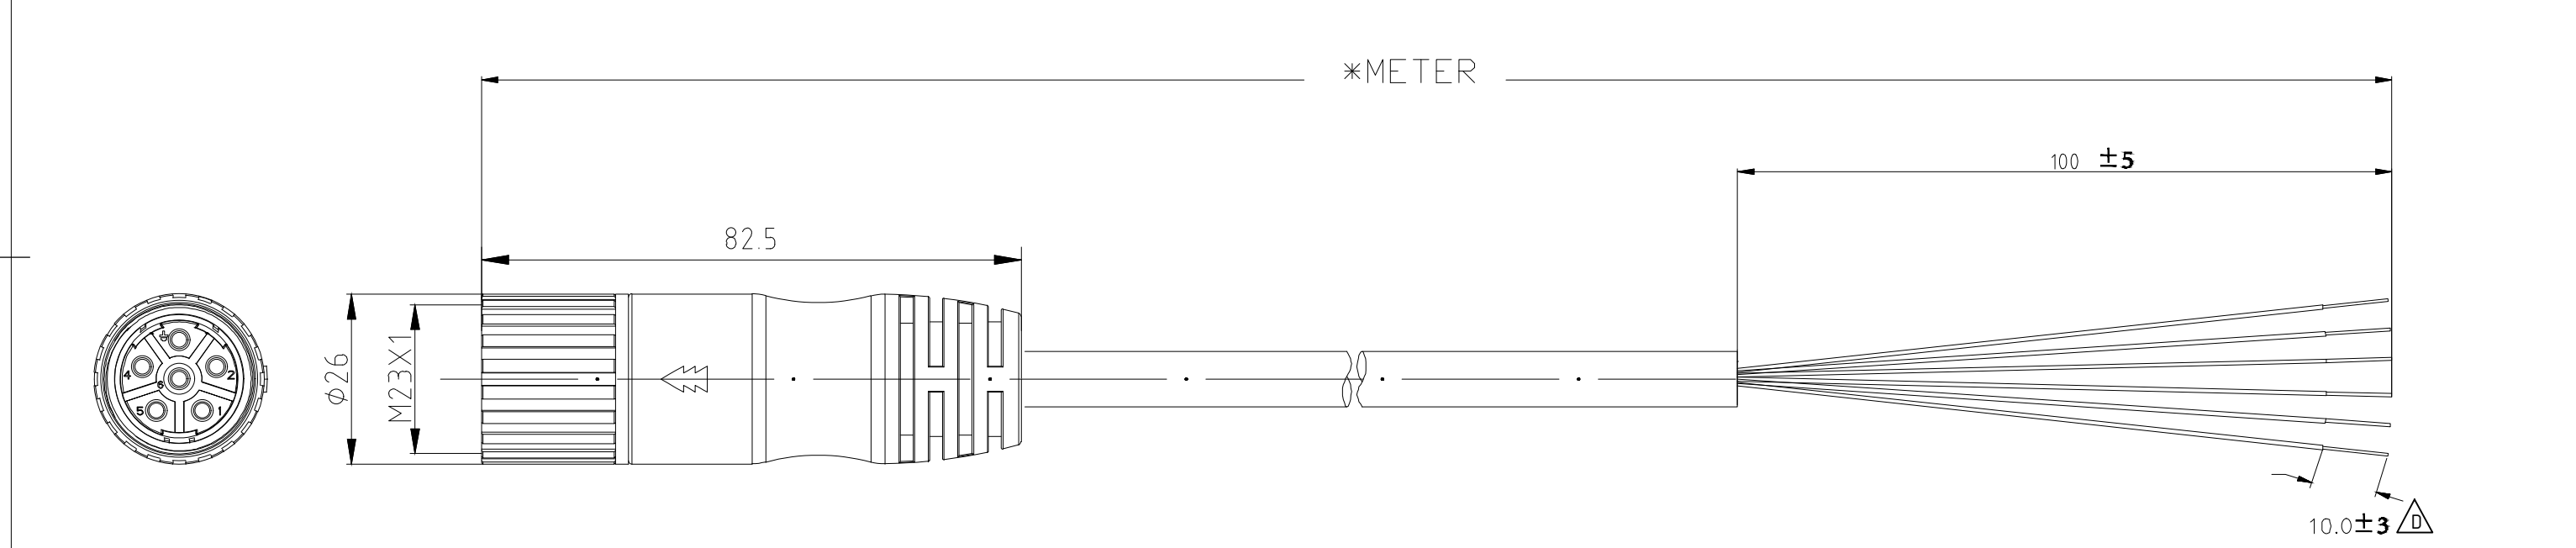

D

Rev.	Description	Appr.	Date
D	Revised stripping tolerance (ECN21405)	Ivy Lin	09/03/21
C	Change raw cable supplier (ECN21375)	Ivy Lin	08/10/21
B	Update connector view (ECN20097)	Ivy Lin	04/13/20
A	First issue.	Lucy Zheng	06/04/19

	All rights reserved Department HCS - CN	Tech. Character.	Free size tol.	According to production drawing
Created by LINI		Inspected by LIANL	Standardisation LIANL	Date 2021-09-03
State Final release		Doc-Key / ECM-Nr. /		
Title M23_6P FE,int-thread,STR PUR cable,xxM		Type TB	Number 2137 38 00 6 76 XXX	Rev. D
HARTING Customised Solutions		Page 1/1		
D-32339 Espelkamp				